



**TAA**  
COMPLIANT

peplink

# BOne Plus

Supercharged Connectivity for  
Remote Offices and Small Businesses




**Dual Ethernet WAN** architecture keeps  
you connected even when one of your  
Internet lines goes down



## Seamless **Failover**

Backup connections are  
always ready to kick in  
instantly



## Automated **Load Balancing**

Optimize network  
performance by with  
advanced load balancing  
algorithms



## **Traffic** Steering

Ensure applications don't  
stutter by prioritizing  
important network traffic



**Built-in cellular modem** for triple-redundancy, low-bandwidth and management applications; includes **eSIM** for zero-touch setup

- VOIP, video calls, POS/payment terminals



Designed for remote locations, reduce dispatches, site visits, and pre-staging work with **InControl2** and **InTouch**

- Instant Internet connectivity out-of-the-box - SIM or BYO eSIM

**Highly cost-effective solution** for the most reliable Internet

- Low cost
- Highly reliable
- Long-term support







**SpeedFusion** technology seamlessly bonds multiple Internet connections into one more-reliable Internet feed

## Use Cases

### REMOTE OFFICE




### SMALL BUSINESS



### WAREHOUSE





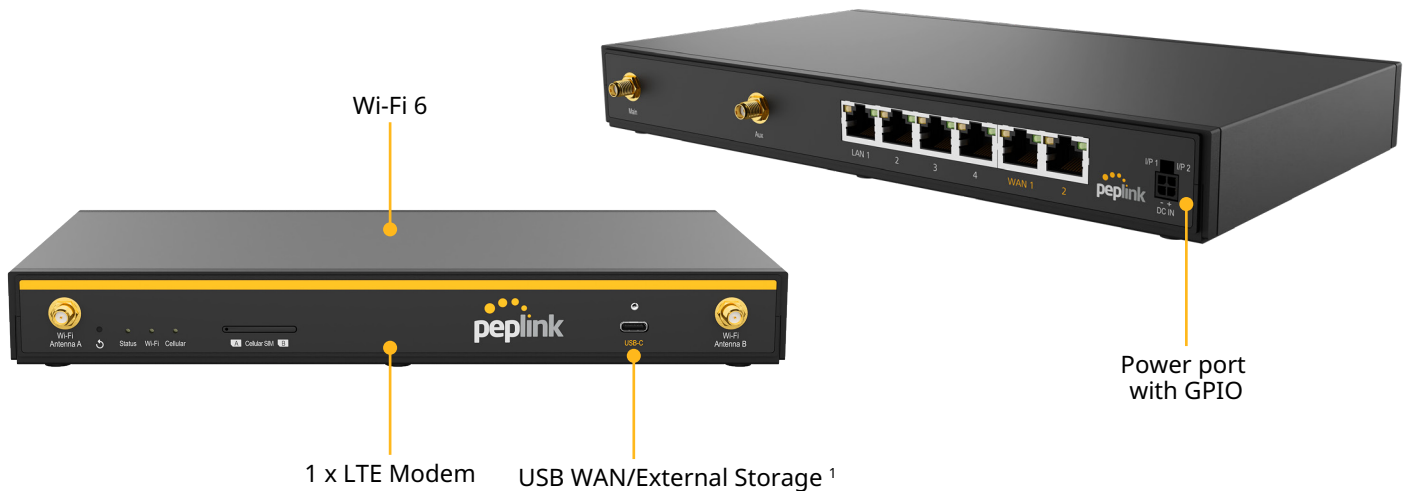

## Specifications

<b>WAN Interface</b>	2x 10/100/1000M Ethernet 1x Embedded Cellular Modem with a Redundant SIM Slot 1x USB-C Interface	<b>Antenna Connectors</b>	2x SMA Cellular Connectors 2x RP-SMA Wi-Fi Antenna Connectors
<b>LAN Interface</b>	4x 10/100/1000M Ethernet	<b>Power Input</b>	Power Port: 10V – 30V DC AC Adapter: AC Input 100V–240V / DC Output 12V
<b>Wi-Fi Interface</b>	Simultaneous Dual-Band (2.4GHz / 5GHz) Wi-Fi 6, 2X2 MIMO Wi-Fi WAN and/or AP	<b>Power Consumption</b>	6W (nominal), 17W (max. without USB-C output <sup>6</sup> )
<b>SpeedFusion features</b>	Hot Failover <sup>2</sup> / Smoothing <sup>2</sup> / Bandwidth Bonding <sup>2</sup>	<b>Dimension</b>	10.31 x 6.33 x 1.31 inches / 262 x 161 x 33.5 mm
<b>Number of SpeedFusion VPN Peers</b>	2 / 5 / 10 / 20 <sup>3</sup>	<b>Weight</b>	1.7 pounds / 761 grams
<b>Router Throughput</b>	1Gbps	<b>Operating Temperature</b>	- 40° – 113°F / - 40° – 45°C
<b>SpeedFusion VPN Throughput</b> - No Encryption - 256-bit AES	400 Mbps 200 Mbps	<b>Humidity</b>	10% – 90% (non-condensing)
<b>Recommended Users</b>	1-150	<b>Certifications</b>	FCC, CE, RoHS
<b>AP Controller</b>	Standard	<b>Package Content</b>	1x B One Plus 2x LTE/5G Antennas 2x Dual Band Wi-Fi Antennas 1x 12V 3A 4 Pin Power Supply (ACW-672)
<b>Maximum Number of AP Supported</b>	30 / 50 <sup>4</sup>	<b>SIM Options</b>	Nano-SIM (4FF) Peplink eSIM <sup>7</sup> BYO eSIM (2 profiles) <sup>7</sup> RemoteSIM from SIM Injector <sup>8</sup> FusionSIM <sup>8</sup>
<b>Cellular Data Rate <sup>5</sup> (Downlink / Uplink)</b>	CAT-4: 150 Mbps / 50 Mbps	<b>Warranty</b>	1-Year Limited Warranty

<sup>1</sup> Requires LIC-DOC license and firmware 8.5.2 or above to enable Docker.  
<sup>2</sup> Requires a PrimeCare subscription, complimentary for the first year.  
<sup>3</sup> 5 SpeedFusion VPN Peers are enabled with PrimeCare Subscription. 10 or 20 SpeedFusion VPN peers can be enabled with software license (PVN-LC-10 and PVN-LC-20).  
<sup>4</sup> Available with licence add-on (AP-LC-50).  
<sup>5</sup> Theoretical maximum data rates.  
<sup>6</sup> USB-C Output : 5V at 2A can be delivered to power the MAX Adapter or other USB dongles for USB WAN.  
<sup>7</sup> Models with selected SKU support eSIM. Details can be found [here](#).  
<sup>8</sup> RemoteSIM and FusionSIM are compatible with hardware version 2 or above.



## Ordering Information

Product Code	Regions^	LTE Bands	3G Bands
B-ONE-PLUS-LTE-US-T-PRM Embedded Modem: 1 x CAT-4	North America*  *US Carrier Certifications: AT&T, T-Mobile, Verizon, FirstNet	B2, B4, B5, B12, B13, B14, B66, B71	B2, B4, B5
B-ONE-PLUS-LTE-E-T-PRM Embedded Modem: 1 x CAT-4	APAC, EMEA	B1, B3, B5, B7, B8, B20, B38, B40, B41	B1, B5, B8
B-ONE-PLUS-LTE-MX-T-PRM Embedded Modem: 1 x CAT-4	Latin America	B1, B2, B3, B4, B5, B7, B8, B28, B40	B1, B2, B3, B4, B5, B8

^ Regions are for reference only. For specific location compatibility, please refer to the bands.

## Featured Add-on

Product Code	Description
PRM-A-1Y / PCP-A-1Y	PrimeCare A / PrimeCare+ A (1-Year)
PRM-A-2Y / PCP-A-2Y	PrimeCare A / PrimeCare+ A (2-Year)
PRM-A-4Y / PCP-A-4Y	PrimeCare A / PrimeCare+ A (4-Year)
ACW-791	4-Pin Micro-Fit to USB-C Power Cable
ACW-634	10ft / 3m DC Power Cable
ACW-235	Indoor Very Wideband Cellular Antenna
ACW-341	Dual-Band Indoor Wi-Fi Omni Antenna in Black (RP-SMA)
ANT-SLM-22G-S-B-6	Slim 22G - 2x2 MIMO Cellular and Wi-Fi Antenna System with GPS (Black)



## Deep Dive

Software	Pepwave MAX Firmware	Networking	NAT and IP Forwarding Static Routes Port Forwarding Many to One, One to One NAT NAT Pool SIP ALG, H.323 ALG UPnP, NAT-PMP
WAN	Support for PPPoE, Static IP, DHCP WAN Link Health Check Bandwidth Allowance Monitor Support for Dynamic DNS services		
LAN	DHCP Server for LAN Clients Extended DHCP Option DHCP Reservation DNS Proxy for LAN Clients VLAN on LAN Support	AP Controller	Support for Pepwave AP Series Auto AP Discovery Auto AP Firmware Management AP Profile Configuration Wi-Fi Usage Statistics
Security	Stateful Firewall DoS Prevention Web Blocking	Captive Portal Support	Support for Wired and Wireless LAN clients Support RADIUS Authentication Time and Usage Quotas on Open Access Mode Built-in Customizable Splash Page
Complete VPN Solution	SpeedFusion VPN/SpeedFusion <ul style="list-style-type: none"><li>Hot Failover</li><li>Site-to-Site VPN</li><li>256-bit AES Encryption</li><li>Pre-shared Key Authentication</li><li>Dynamic Routing</li></ul> X.509 Certificate Support IPsec VPN (Network-to-Network)	Device Management	Web Administrative Interface Command Line Interface InControl Cloud Management Email Notification Active Client & Session Lists Bandwidth Usage Statistics Syslog Service SNMP v1, v2c and v3
Advanced QoS	Individual Bandwidth Limit Application Prioritization <ul style="list-style-type: none"><li>SIP, HTTPS, VPN QoS</li><li>Custom Application QoS</li></ul>		